

Amogh-dd-23

MICRO CONTROLLER AUTO DRAIN



TECHNICAL SPECIFICATION


Display : 3 Digit 7 Segment LED
 Supply : 110 V AC/230 V AC, 50Hz (Please Specify)
 Range : ONTIME (0-999 S/M/H (Factory set 1-9 Sec.)
 OFF Time : 0-999 S/M/H (Factory set 99.9 Min.)

INDICATIONS (LED)


S : Set time in Seconds
 M : Set time in Minute
 H : Set time in Hours
 ON : Valve ON

Enclosure : Polycarbonate with IP65 (Weather Proof)
 Valve : Aluminum / Brass / SS 304 / SS 316 (As per requirement)
 Working Pressure : 12 Kg/cm² / 16 Kg/cm² / 40 Kg/cm² / 70 Kg/cm²
 Connection : 1/4"/1/2"/3/4"/1" BSP (F) or NPT (F) (On Demand)

MENU 1

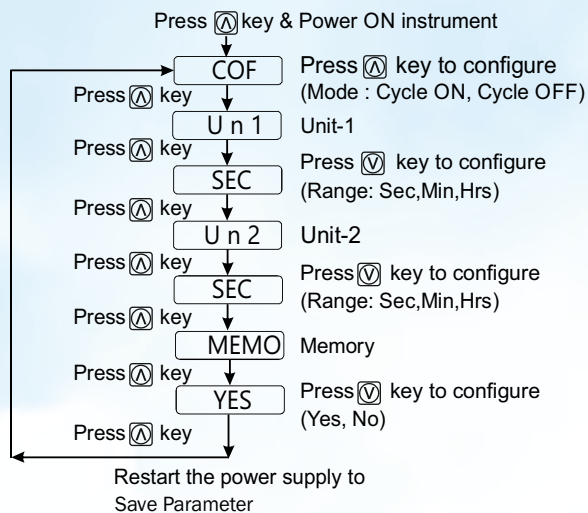

MENU 2

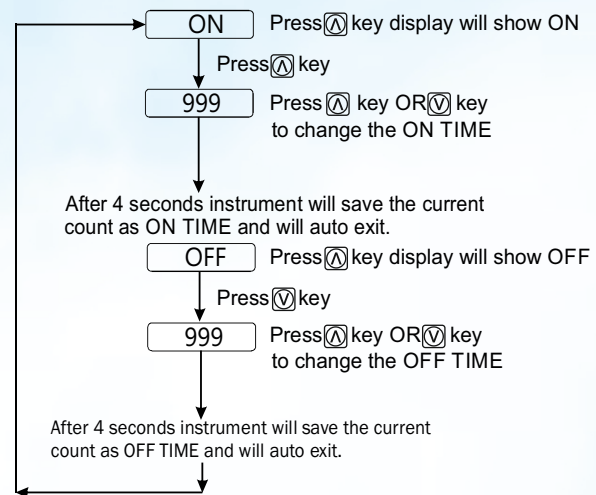

DIP SWITCH SETTING

Use Dip switch to configure SWITCH 1, SWITCH 2, SWITCH 3 & SWITCH 4 for DP Selection.

ON TIME			OFF TIME		
SWITCH-1	SWITCH-2	RANGE	SWITCH-3	SWITCH-4	RANGE
ON	ON	999	ON	ON	999
ON	OFF	99.9	ON	OFF	99.9
OFF	ON	9.99	OFF	ON	9.99
OFF	OFF	.999	OFF	OFF	.999

For Example, If we want to configure the timer like on time 99.9 seconds & off time 999 Min. Set the DIP switches as shown in figure.

WP	ORIFICE (in mm)
12	5.0/4.0
16	2.5
40	1.3
70	0.9

Model Selection

Amogh-d23
 MCD

XX
 X
 Pressure
 12 - 12 Kg/cm²
 16 - 16 Kg/cm²
 40 - 40 Kg/cm²
 70 - 70 Kg/cm²

1 - 1/2"
 2 - 1"
 3 - 3/4"
 4 - 1/4"

XX
 Body Material
 Aluminum - AL
 Brass - BR
 SS - SS-304*

XXXX
 S. No.

* SS-316 Available on request

CONCEPT TECHNOSTRUCTURES

JAIPUR (Marketing & Sales)

Horizon Tower, 504, 5th Floor, J.L.N Marg, Jaipur-302 017, India
 sales@conceptgroups.com • conceptsalesjpr@conceptgroups.com
 0141 4981363, +91 88750 09533

KOTA (Office & Works)

H - 9 (A), Road No. 1, Electronic Complex
 I.P.I.A., Kota - 324 005, (Raj.), India • Tel. : +91 88750 09534
 info@conceptgroups.com www.conceptgroups.com



Amogh-d-23

ISO 9001:2015 Certificate No.
 114629/A/0001/UK/En



CATAMDD2311241