

IN LINE DESICCANT DRYER

Model - ILDD-054



- Model : ILDD-054
- Inlet Port : 1/4" BSP/6mm Polyurethane Tube
- Outlet Port : 1/4" BSP/6mm Polyurethane Tube
- MWP : 12Kg./cm²
- Body Material : Aluminium
- Drain : Manual Drain / Automatic Drain Valve (Optional)
- CFM : 10

Application:- Air Tools, Spray Painting, Powder Coating


Working:-

The compressed air flow through the bottom of the dryer and distributed uniformly and passed through the desiccant bed. The moisture is drained at the bottom either with manual drain or automatic drain valve (optional).



MANUAL DRAIN VALVE

AUTOMATIC DRAIN VALVE

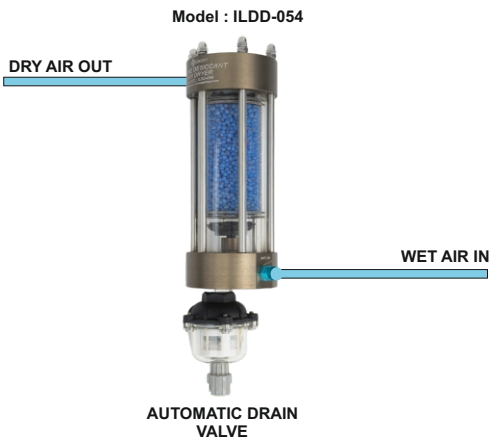

INSTALLATION :-

The installation can be done IN-LINE with flexible PU tube and connectors provided with the unit. Please see below the installation diagram.



CONCEPT TECHNOSTRUCTURES

Horizon Tower, 504, 5th Floor, J.L.N. Marg, Jaipur - 302017, India
M. No.: +91- 8875009534, 9799917442
Tel. No.+91- 0141-4981363
Email : sales@conceptgroups.com / conceptsalesjpr@conceptgroups.com
conceptjpr@conceptgroups.com
Website : www.conceptgroups.com

Certificate Number:
114629/A/0001/UK/En
ISO 9001:2015



CONCEPT
ILDD - R-01

CATILDD5411241