

# AUTOMATIC DRAIN VALVE

Model - HPV-401



**CONCEPT HPV-401** is Designed to Remove Condensate from Compressed Air-Systems. Most Suitable for installation on Drip Legs, Moisture-separator etc. Valve has facility to Drain Manually on Power Failure.


## Specifications :

### Timer

- Interval Time : 1-128 Min. Adjustable
- Drain Time : 4 Sec. (Other on request)
- Supply Voltage : 230VAC (160-260), 50Hz (Other on request)
- Operating Temp. : 70°C (Maximum)
- Housing Material : High Impact Resistant ABS
- Connection : DIN 43650 A with Power Indication
- Indications : LED (Red)- Power On  
LED (Yellow)- "On" after every 15 sec. Indicate healthiness of timer  
LED (Green)- "On" during drain cycle

### Valve

- Type : 2 Way Pilot Operated
- In/Out Ports : ½" BSP (F)
- Working Pressure : 40 bar
- Valve Body : Gun Metal
- Orifice : 12 mm
- Pilot Pressure : 2.5 to 40 bar

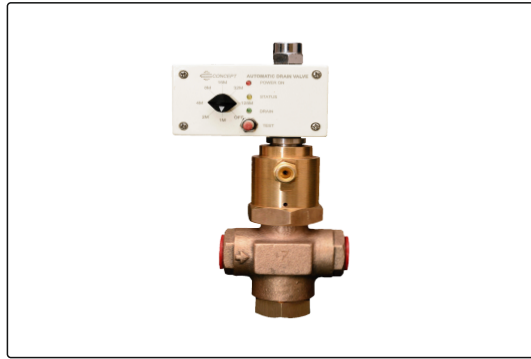

Model - HPV-401

## Automatic Drain Valve Model : HPV-401

Model	Orifice	MWP	Connection Size	Features
HPV-401	12 mm	40 bar	½" BSP (F)	High Discharge Pilot Operated Test Switch Fault Indication



## CONCEPT TECHNOSTRUCTURES

Horizon Tower, 504, 5th Floor, J.L.N. Marg, Jaipur - 302017, India  
M. No.: +91- 8875009534, 9799917442  
Tel. No. +91- 0141-4981363  
Email : sales@conceptgroups.com / conceptsalesjpr@conceptgroups.com  
conceptjpr@conceptgroups.com  
Website : www.conceptgroups.com

Certificate Number:  
114629/A/0001/UK/En  
ISO 9001:2015



CONCEPT  
ADV - R-01

CATHPVXX111241