

# AUTOMATIC DRAIN VALVE

Model - EDV-251 / 351



**CONCEPT EDV-251/351** is Designed to Remove Condensate from Compressed Air Systems. Most Suitable for installation on Compressors After Coolers, Drip Legs, Moisture-separator etc. Valve has facility to Drain Manually on Power Failure.

## Specifications :


### Timer

- Interval Time : 1 - 128 Min. Adjustable
- Drain Time : 4 Sec.
- Supply Voltage : 230VAC (160-260), 50Hz (Other on request)
- Operating Temp. : 70°C (Maximum)
- Housing Material : High Impact Resistant ABS
- Connection : DIN 43650 A with Power Indication
- Indications : LED (Red)- Power On  
LED (Green)- 'On' during drain cycle
- Test Switch

### Valve

- Type : 2 Way Direct Acting
- In/Out Ports : ½" BSP (F)\*
- Working Pressure : 25 / 35 Kg./cm<sup>2</sup>
- Valve Body : Bar Stock Aluminium or S.S. 304
- Orifice : 1.3 / 1.8 mm

\* NPT (F) is available on request

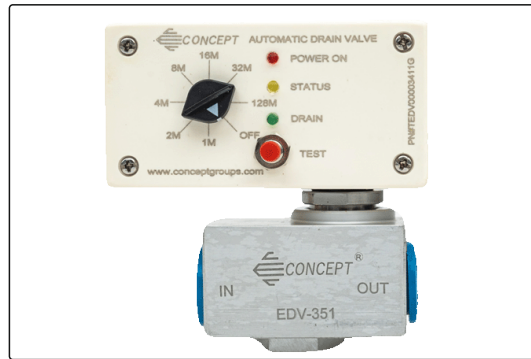

Model - EDV-251/351

## Automatic Drain Valve Model : EDV-251/351

Model	Orifice	MWP	Connection Size	Features
EDV - 251	1.8 mm	25 Kg/cm <sup>2</sup>	½" BSP (F)	Poppet Type Compact Test Switch Fault Indication Inbuilt Strainer
EDV - 351	1.3 mm	35 Kg/cm <sup>2</sup>	½" BSP (F)	



## CONCEPT TECHNOSTRUCTURES

Horizon Tower, 504, 5th Floor, J.L.N. Marg, Jaipur - 302017, India  
M. No.: +91- 8875009534, 9799917442  
Tel. No.+91- 0141-4981363  
Email : sales@conceptgroups.com / conceptsalesjpr@conceptgroups.com  
conceptjpr@conceptgroups.com  
Website : www.conceptgroups.com

Certificate Number:  
114629/A/0001/UK/En  
ISO 9001:2015



CONCEPT  
ADV - R-01

CATEDV25X11241